


 DÜRKOPP
ADLER

Traditional

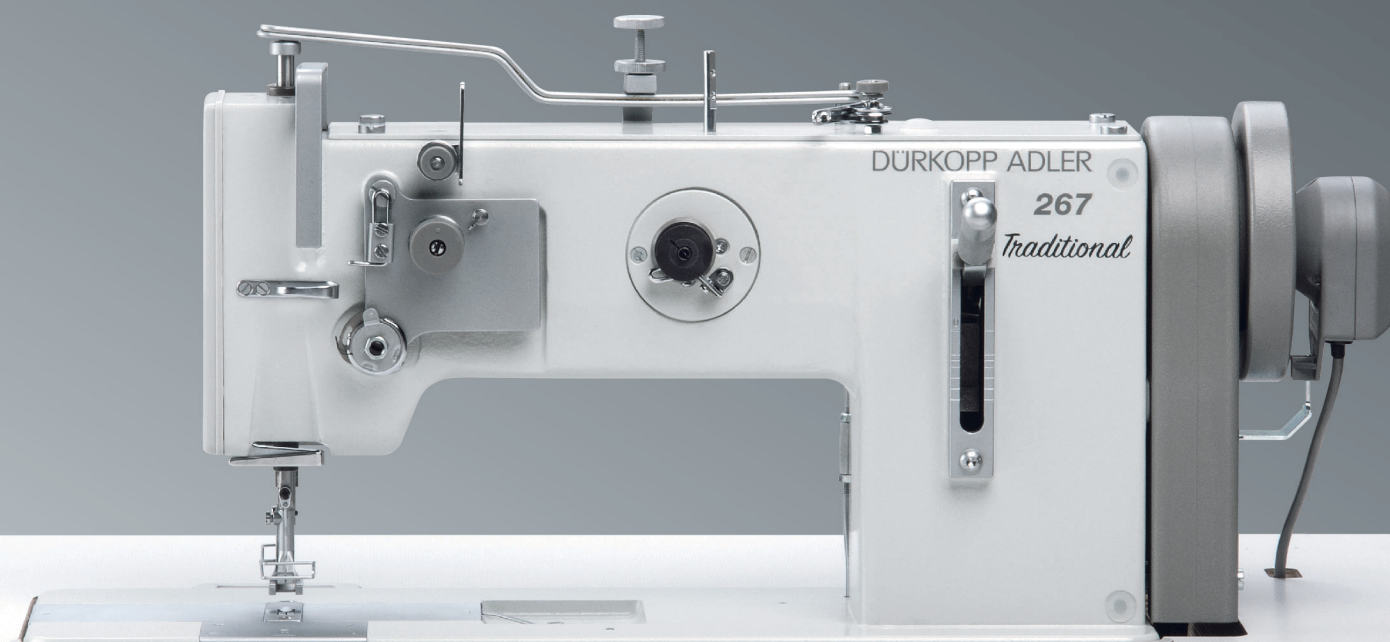

267 传统型

单针锁缝平板三同步机，适用于中等厚度的材料

Single needle lockstitch flat bed machine for medium-weight material

一般厚料缝纫操作基本型三同步机

Basic flatbed machine for general sewing operations

267传统型坚固耐用的机械结构使得这款DA传统机器成为中等重量材料（如内饰，皮革制品和工业用纺织品）的一般缝合操作设备。

The robust and proven construction of the 267 Traditional has made this Dürkopp Adler Traditional machine an operating equipment for general stitching in medium weight material like upholstery, leather articles and technical textiles.

底牙送料，针送料和交替压脚上料以及其较高之压脚冲程确保了良好的送料和穿越交叠的接缝。垂直式旋梭适用于使用实心缝纫线的制造。标准的安全离合器有助于防止旋梭损坏或旋梭钩线时间的不受控制的改变。

The bottom feed, needle feed and alternating top feed as well as its high stroke of the sewing foot ensure a good material feed and an easy crossing of transversal seams. The vertical hook is suited for the manufacturing with solid sewing threads. The standard safety clutch helps to prevent hook damage or uncontrolled change of hook timing.



技术优势

- 良好的接缝质量和强力的送料系统由三同步送料系统内的交替压脚提供优质的送料行程
- 坚固可靠的机械结构
- 良好的性价比

Your advantages

- Good seam quality and strong material feeding due to triple feed with alternating sewing feet
- Robust and proven construction
- Good cost-performance-ratio

	mm	s.p.m.			301			
	针码长度	每分钟/针数	物料	单针	锁缝301	垂直旋梭, 大型	底牙送料的椭圆行程运动, 针送料和交替压脚上送料	交替压脚冲程
	Stitchlength	Stitches/min.	Material	Single needle	Lockstitch	Vertical hook, large	Bottom feed, needle feed and alternating feet	Stroke of the alternating sewing feet
	[mm] max.	[min ⁻¹] max.						[mm] max.
267-373	6	1.700	M, MS	●	●	●	●	5

● = 标配缝制配件 / Standard equipment M = 中等厚度材料 / Medium-weight material MS = 中等厚度至厚重材料 / Medium-weight to heavy-weight material

	A B	System	Nm	Nm
	A = 缝制时空间, B = 抬压脚时空间 A = Clearance when sewing, B = Clearance when lifting	机针系统 Needle system	机针尺寸 Needle size	化纤合成线 / 包芯线 Synthetic / Core thread
	A [mm] max. B [mm] max.		[Nm] max.	max.
267-373	6 10	134-35	110 – 140	80/3 – 20/3

	标称电压 Nominal voltage	额定功率 Rated power	重量, 缝纫机头 Weight, sewing head	尺寸 (长, 宽, 高) Dimensions (Length, Width, Height)	臂下空间 Clearance
	[V], [Hz]	[W]	[kg]	[mm] max.	C [mm] D [mm]
267-373	1x230V, 50/60 Hz	500	41	1.060 500 1.700	285 115

Dürkopp Adler AG

Potsdamer Str. 190 • 33719 Bielefeld, Germany • Phone +49 (0) 521 925-00 • Fax +49 (0) 521 925-2646 info@duerkopp-adler.com • www.duerkopp-adler.com